CS473-Algorithms I

Lecture 7

Median and Order Statistics

Cevdet Aykanat - Bilkent University
Computer Engineering Department

Order Statistics(Selection Problem)

- Select the i-th smallest of n elements

  (select the element with rank i)

– $i = 1$: minimum

– $i = n$: maximum

– $i = \lfloor (n+1)/2 \rfloor$ or $\lceil (n+1)/2 \rceil$:median

- Naive algorithm: Sort and index i-th element

$$T(n) = \Theta(n\lg n)+\Theta(1)$$
$$= \Theta(n\lg n)$$

using merge sort or heapsort(not quicksort)

Selection in Expected Linear Time

- Randomized algorithm
- Divide and conquer
- Similar to randomized quicksort

– Like quicksort: Partitions input array recursively

– Unlike quicksort:

  – Only works on one side of the partition

  – Quicksort works on both sides of the partition

– Expected running times:

  – SELECT: $E[n] = \Theta(n)$

  – QUICKSORT: $E[n] = \Theta(n \lg n)$

Selection in Expected Linear Time (example)

Select the $i = 7$th smallest

6	10	13	5	8	3	2	11

$i = 7$

Partition:

2	3	5	13	8	10	6	11

2	3	5	13	8	10	6	11

select the 7-3=4th smallest element recursively

Selection in Expected Linear Time

```
R-SELECT(A,p,r,i)
    if p = r then
        return A[p]
  q ← R-PARTITION(A, p, r)
  k ← q–p+1
  if i ≤ k then
        return R-SELECT(A, p, q, i)
else
        return R-SELECT(A, q+1, r, i-k)
```

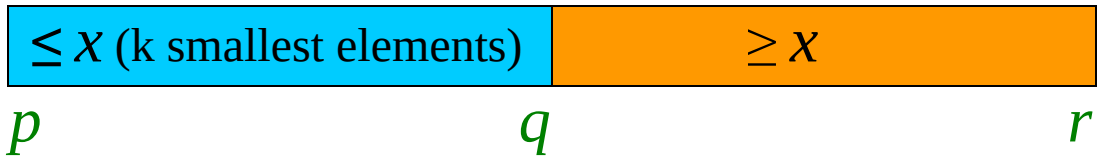

$x = pivot$

Selection in Expected Linear Time

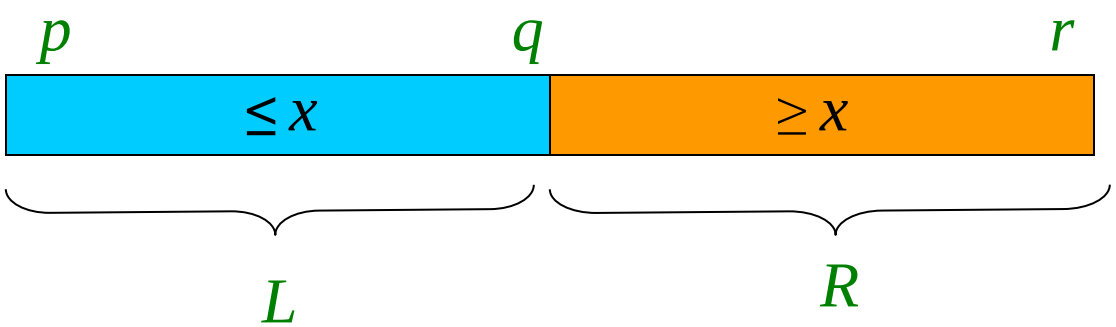

$x = pivot$

- All elements in L ≤ all elements in R
- L contains $|L| = q-p+1$ = k smallest elements of $A[p...r]$

  if $i \leq |L| = k$ then

  search L recursively for its i-th smallest element

  else

  search R recursively for its $(i-k)$-th smallest element

Selection in Expected Linear Time

- Excellent algorithm in practise
- Worst-case: $T(n) = T(n-1)+\Theta(n) \Rightarrow T(n) = \Theta(n^2)$
  - Worse than sorting
  - e.g., occurs when
    - $i = 1$ and
    - Partition returns $q = r - 1$ at each level of recursion
- Best-case: $T(n) = T(n/2)+\Theta(n) \Rightarrow T(n) = \Theta(n)$

Average-Case Analysis of Randomized Select

Recall: $P(|L|=i) = \begin{cases} 2/n & \text{for } i = 1 \\ 1/n & \text{for } i = 2,3,\ldots,n-1 \end{cases}$

Upper bound: Assume i-th element always falls into the larger part

$$T(n) \le \frac{1}{n} T(\max(1, n-1)) + \frac{1}{n} \sum_{q=1}^{n-1} T(\max(q, n-q)) + O(n)$$

But, $\frac{1}{n} T(\max(1, n-1)) = \frac{1}{n} T(n-1) = \frac{1}{n} O(n^2) = O(n)$

$$\therefore \quad T(n) \le \frac{1}{n} \sum_{q=1}^{n-1} T(\max(q, n-q)) + O(n)$$

Average-Case Analysis of Randomized Select

$$\therefore\ T(n) \le \frac{1}{n}\sum_{q=1}^{n-1} T(\max(q, n-q)) + O(n)$$

$$\max(q, n-q) = \begin{cases} q & \text{if } q \ge \lceil n/2 \rceil \\ n-q & \text{if } q < \lceil n/2 \rceil \end{cases}$$

n is odd: $T(k)$ appears twice for $k = \lceil n/2 \rceil+1, \lceil n/2 \rceil+2,\ldots,n-1$

n is even: $T(\lceil n/2 \rceil)$ appears once $T(k)$ appears twice for

$k = \lceil n/2 \rceil+1, \lceil n/2 \rceil+2,\ldots,n-1$

Hence, in both cases: $\sum_{q=1}^{n-1} T(\max(q, n-q)) + O(n) \le 2\sum_{q=\lceil n/2 \rceil}^{n-1} T(q)$

$$\therefore\ T(n) \le \frac{2}{n}\sum_{q=\lceil n/2 \rceil}^{n-1} T(q) + O(n)$$

Average-Case Analysis of Randomized Select

$$T(n) \le \frac{2}{n} \sum_{q=\lceil n/2 \rceil}^{n-1} T(q) + O(n)$$

By substitution guess $T(n) = O(n)$

Inductive hypothesis: $T(k) \le ck, \ \forall\ k < n$

$$T(n) \le 2\sum_{k=\lceil n/2 \rceil}^{n-1} ck + O(n)$$

$$= \frac{2c}{n}\left(\sum_{k=1}^{n-1} k - \sum_{k=1}^{\lceil n/2 \rceil - 1} k \right) + O(n)$$

$$\frac{2c}{n}\left(\frac{1}{2} n(n-1) - \frac{1}{2}\left\lceil \frac{n}{2} \right\rceil \left(\frac{n}{2} - 1 \right) \right) + O(n)$$

Average-Case Analysis of Randomized Select

$$T(n) \le \frac{2c}{n}\left(\frac{1}{2}n(n\text{-}1) - \frac{1}{2}\left\lceil\frac{n}{2}\right\rceil\left(\frac{n}{2} - 1\right)\right) + O(n)$$

$$\le c(n\text{-}1) - \frac{c}{4}n + \frac{c}{2} + O(n)$$

$$= cn - \frac{c}{4}n - \frac{c}{2} + O(n)$$

$$= cn - \left(\left(\frac{c}{4}n + \frac{c}{2}\right) - O(n)\right)$$

$$\le cn$$

since we can choose c large enough so that **(*cn*/4+*c*/2) dominates O(*n*)**

Summary of Randomized Order-Statistic Selection

- Works fast: linear expected time
- Excellent algorithm in practise
- But, the worst case is very bad: $\Theta(n^2)$

Q: Is there an algorithm that runs in linear time in the worst case?

A: Yes, due to Blum, Floyd, Pratt, Rivest & Tarjan[1973]

Idea: Generate a good pivot recursively..

Selection in Worst Case Linear Time

```
SELECT(S, n, i)   ▷ return i-th element in set S with n elements
        if n ≤ 5 then
                SORT S and return the i-th element
        DIVIDE S into ⌈n/5⌉ groups
        ▷ first ⌈n/5⌉ groups are of size 5, last group is of size n mod 5
        FIND median set M={m_1, …, m_⌈n/5⌉} ▷ m_j: median of j-th group
        x ← SELECT(M, ⌈n/5⌉, ⌊(⌈n/5⌉+1)/2⌋)
        PARTITION set S around the pivot x into L and R
        if i ≤ |L| then
                return  SELECT(L, |L|, i)
        else
                return  SELECT(R, n–|L|, i–|L|)
```

Choosing the Pivot

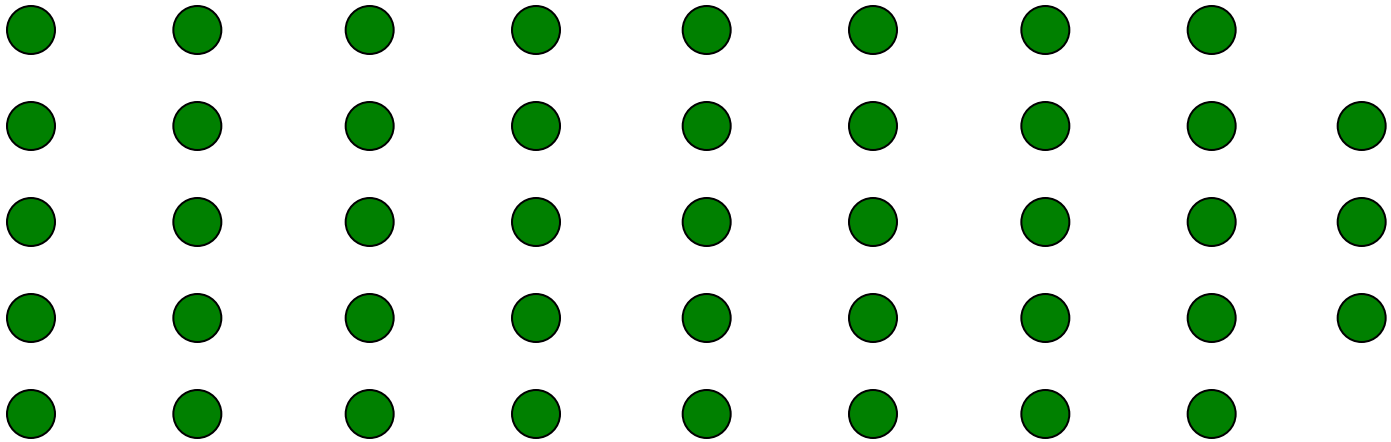

1. Divide S into groups of size 5

Choosing the Pivot

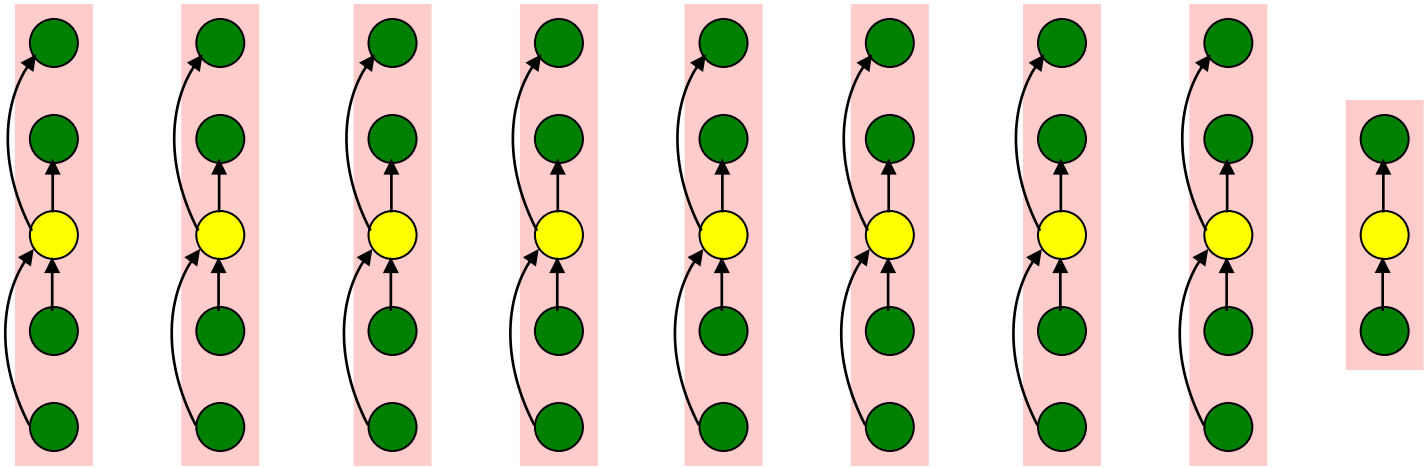

1. Divide S into groups of size 5
2. Find the median of each group



Choosing the Pivot

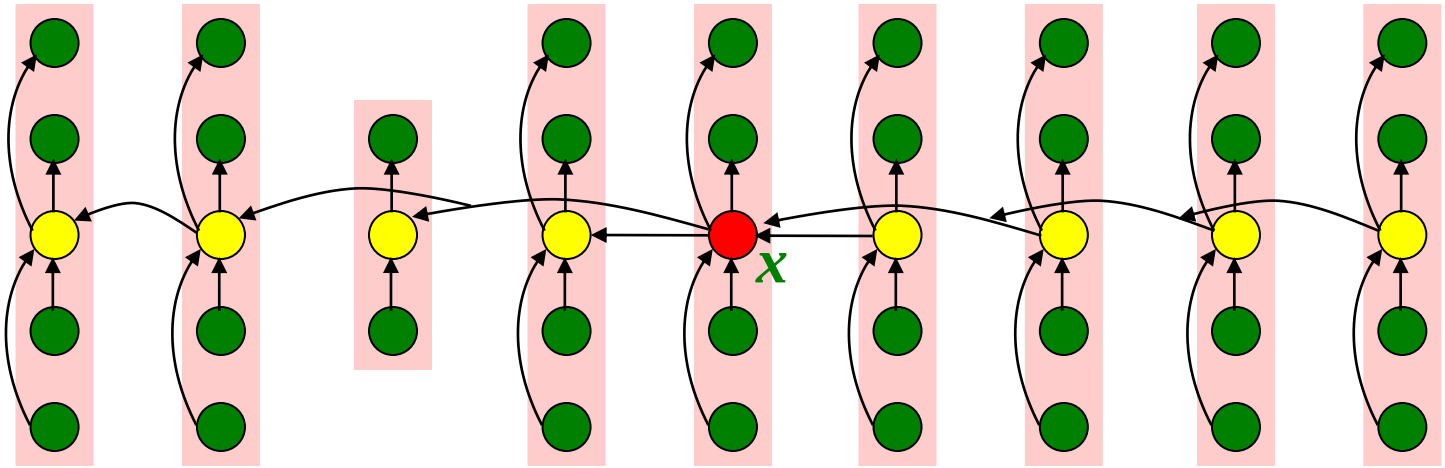

1. Divide S into groups of size 5
2. Find the median of each group
3. Recursively select the median x of the medians



Choosing the Pivot

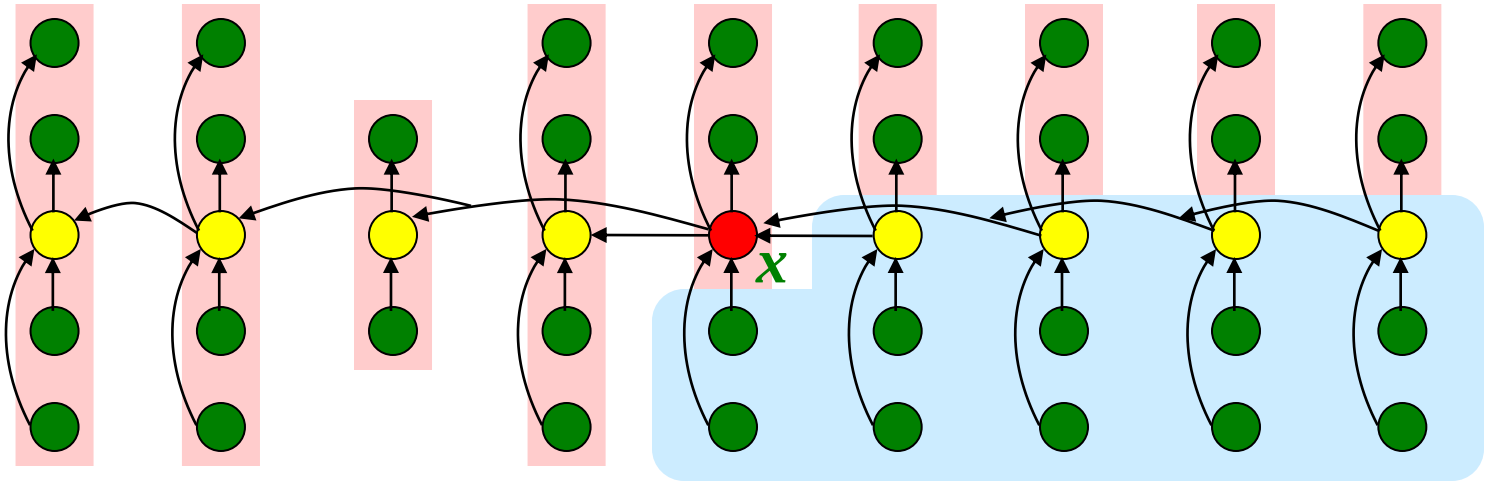

At least half of the medians $\geq x$

Thus $m = \left\lceil \lceil n/5 \rceil / 2 \right\rceil$ groups contribute 3 elements to R except possibly the last group and the group that contains x

$$|R| \geq 3\left(m-2\right) \geq \frac{3n}{10} - 6$$



Analysis

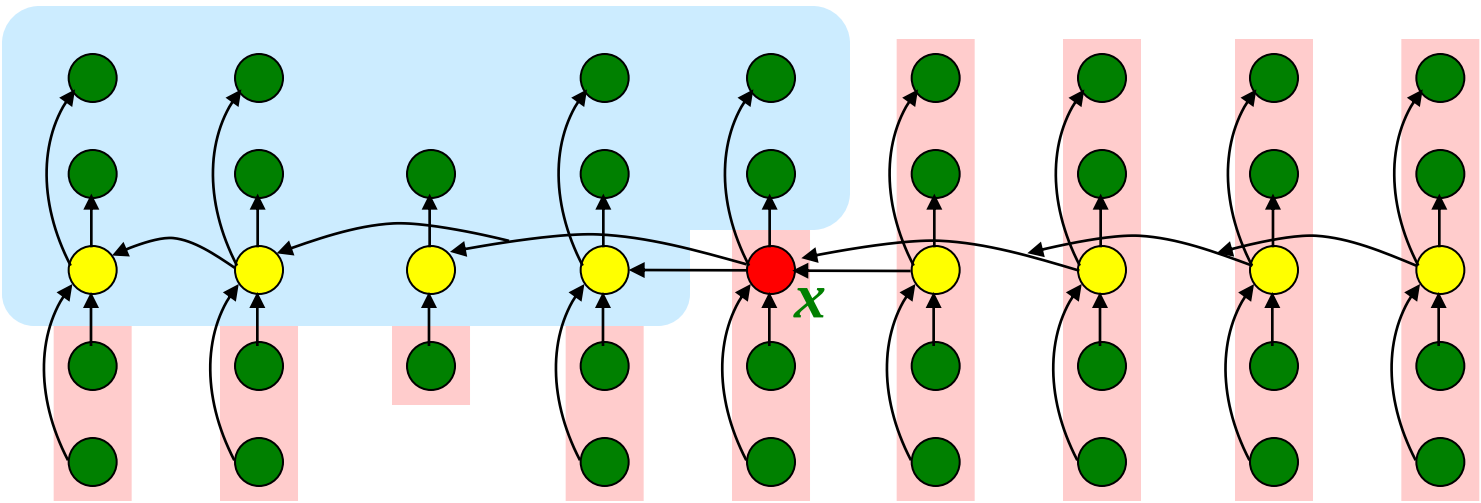

Similarly

$$|L| \geq \frac{3n}{10} - 6$$

Therefore, SELECT is recursively called on at most

$$n - \left(\frac{3n}{10} - 6\right) = \frac{7n}{10} + 6 \text{ elements}$$



Selection in Worst Case Linear Time

SELECT(S, n, i) ▷ return ***i***-th element in set S with ***n*** elements

if $n \le 5$ then

SORT S and return the i-th element

$\Theta(n)$ DIVIDE S into $\lceil n/5 \rceil$ groups

$\Theta(n)$ ▷ first $\lfloor n/5 \rfloor$ groups are of size 5, last group is of size n mod 5

$\Theta(n)$ FIND median set M={m_1 , …, $m_{\lceil n/5 \rceil}$} ▷ m_j: median of j-th group

$T(\lceil n/5 \rceil)$ $x \leftarrow$ SELECT(M, $\lceil n/5 \rceil$, $\lfloor (\lceil n/5 \rceil+1)/2 \rfloor$)

$\Theta(n)$ PARTITION set S around the pivot x into L and R

$T(\frac{7n}{10}+6)$ if $i \le |L|$ then

return SELECT(L, $|L|$, i)

else

return SELECT(R, n$-|L|$, $i-|L|$)

Selection in Worst Case Linear Time

Thus recurrence becomes

$$T(n) \le T\left(\left\lceil \frac{n}{5} \right\rceil\right) + T\left(\frac{7n}{10} + 6\right) + \Theta(n)$$

Guess $T(n) = O(n)$ and prove by induction

Inductive step: $T(n) \le c\lceil n/5 \rceil + c\,(7n/10+6) + \Theta(n)$

$\le cn/5 + c + 7cn/10 + 6c + \Theta(n)$

$= 9cn/10 + 7c + \Theta(n)$

$= cn - [c(n/10 - 7) - \Theta(n)] \le cn$ for large c

Work at each level of recursion is a constant factor (9/10) smaller